



Extreme Less Latency

Extreme less network latency provides highly efficiency monitoring environments without system delay.

Multiple Profile Streaming

"Bryan" cameras support H.265/264/MJPEG Triple codec and multiple streaming capabilities.



Users can select the relevant codec to suit their individual requirement, such as, real-time monitoring, high-quality or high-efficiency recording, mobile monitoring and E-mail notification.



WDR(Wide Dynamic Range)

WDR is a powerful and ultra-advanced technology that captures cleaner and superior high resolution pictures, even where images appear dark because there is a strong back light present.



Video Analytics

Video Analytics on the "Bryan" cameras includes: Motion Detection, which detects when a change has occurred in predefined areas in the field of view, Trip zone /Enter/Exit functions, which detect if a breach has occurred in a predefined area and Tampering detection that automatically alarms when a camera is disrupted.

ISO 9001 ISO 14001 RoHS   

BR-NVR3616HP

16CH H.265+ POE NVR



Features

- Third-party Network Cameras Supported
- Up to 4K Resolution Recording and Playback
- HD and VGA Output, HD Port up to 4K (3840*2160)
- H.265+/H.265/H.264+/H.264 Video Format
- Support 4 SATA up to 32TB Capacity
- Support 16 Independent PoE Network Interfaces
- CE, FCC

Storage

Interface Type	4SATA Hard Disk Interface (2.5"/3.5" SATA)
Capacity	Up to 32TB capacity
eSATA	1eSATA interface


General

Language UI	Traditional Chinese, Simplified Chinese, English, Polish, Czech, , Russian, Thai, Hebrew, Arabic, Bulgarian German, French, Portuguese, Turkic, Spanish, Italian, Hungarian, Romanian, Korean, Dutch, Greek, Vietnamese, Japanese
USB Interface	2USB 2.0 Interfaces
RS485	1port
Power Supply	AC 100-240V/5.5A
Working Environment	-10~55°C/10~90%
(Dimension(W×D×H	72*356*440 (mm)
Weight	7.5kg without HDD

Specifications

ITEM	BR-NVR3616HP
Main Processor	ARM Cortex A7 Processor
Operating System	Embedded LINUX
Input	25CH (3840×2160, 2592×1944, 2048×1536, 1920×1080, 1280×960, 1280×720, etc)
Output	VGA, 1 HD 1
Audio	
Input	Port RCA 1
Output	1Port RCA(Linear, 1kΩ)
Audio Bit Rate	64kbps
Audio Compression standard	G711u, G711a, ADPCM_DV14
Intercom	support (two-way)
Alarm	
Sensor Input	16
Output	4
Motion Detection	25Channel, MD Zones: 396 (22 × 18)
Trigger Events	Recording, Email, FTP, Snapshot, Buzzer and Screen Tips, alarm output
Display	
HD Output1	Resolution:4K (3840 × 2160)/30Hz, 4K (3840 × 2160)/30Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
HD Output2	/
VGA	Resolution:1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
Display Split	25CHxHD1/16CHxHD1/9CHxHD1/4CHxHD1/1CHx1080P/1CHx3MP/1CHx4MP/1CHx5MP/1CHx4K
Digital Zoom	YES
OSD	Camera Title, Time, Recording, Motion Detection, Event Alarm
Recording	
Video Compression	H265/H264/H265+/H264+
Resolution	4k(3840×2160),5MP(2592×1944),4MP(2688×1520/2560×1440),3MP(2048×1536),1080P(1920×1080),960P(1280×960),720P(1280×720),D1 (720×576/720×480)
Record Rate	PAL: 4k@12×25fp,5MP@20×25fp,4MP@25×25fp,3MP@25×25fp,1080P@25×25fp,960P@25×25fp,720P@25×25fp, D1@25×25fp NTSC: 4k@12×30fp,5MP@20×30fp,4MP@25×30fp,3MP@25×30fp,1080P@25×30fp,960P@25×30fp, 720P@25×30fp, D1@25×30fp
Record Mode	Manual\Timer\Motion Detection\ Alarm\Motion and Alarm\Smart Alarm
Playback & Backup	
Local Sync Playback	1CH 4K@30fps, 1CH 5MP@30fps,2CH 4MP@30fps, 2CH 3M@30fps, 4CH 1080P@30fps, 4CH 960P@30fps, 4CH 720P@30fps
Decode Capability	1CH 4K(3840×2160)@30fps
Remote Sync Playback	YES
Search Mode	ALL, Channel, Manual, Time, Date, Motion Detection,Event Alarm,Tag search
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow Play, Full Screen, Frame Play ,Frame Rewind, Digital Zoom,tag,clip
Backup Mode	USB Device/Network
Network	
Interface	16x RJ45 (10M/100M Adaptive Ethernet Interface)
Incoming Bandwidth	1xRJ45 10M/100M/1000M Adaptive Ethernet Interface+
Network Functions	120MB TCP/IP, HTTP, UPnP, DNS, NTP, SMTP, DHCP, FTP, DDNS, RTSP, RTCP, p2p,PPPOE
Onvif Version	Support Onvif 2.8
Web Browser	IE8-11, Google Chrome (lower than Ver44), Firefox (lower than Ver53)
CMS Software	Support Windows 7/ Windows 8/Windows 10/MAC OS
Cloud Support	Yes
Smart Phone	iPhone, iPad, Android, Android Pad
POE	16x Independent 100Mbps POE Network Interfaces(Output PowerAT mode 30W, AF mode 15W per Interface), 45/78 line order, Total Power Output ≥200W, Support Plug and Play, Support network cable extended mode Max. 250M
WIFI UI	/

Dimension (unit:mm)

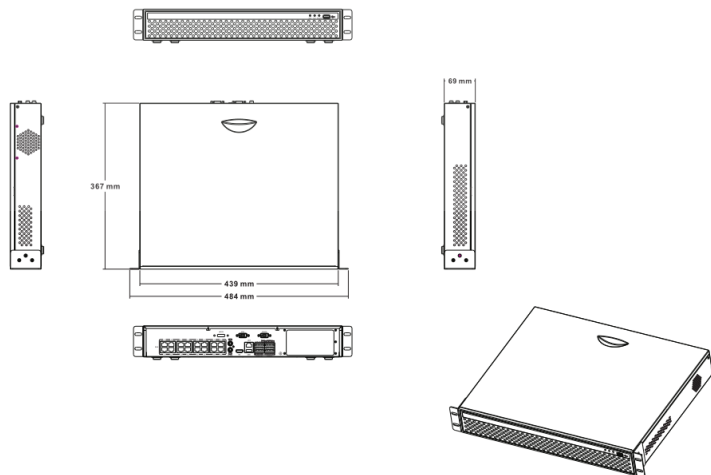

(*) Design and specifications are subject to change for product improvements without prior notice.