


## BR-TS100100 X-ray Baggage Scanner

**Application:** security inspection for carry-on baggage or parcels etc. It is an ideal security inspection system to inspect large size baggage in airports, railway stations, bus stands, government institutions, hotels etc.

### Main Features:

- ◆ Cost Effective
- ◆ Image Archiving
- ◆ Multi-language Support
- ◆ Dual-energy Material Discrimination
- ◆ Assist to Detect Drug and Explosive Powder
- ◆ Powerful X-ray Source Imaging Performance and Penetration
- ◆ Extended Height Tunnel with Square Opening Easily Accepts Outsized Parcels, Boxes and Other Freight

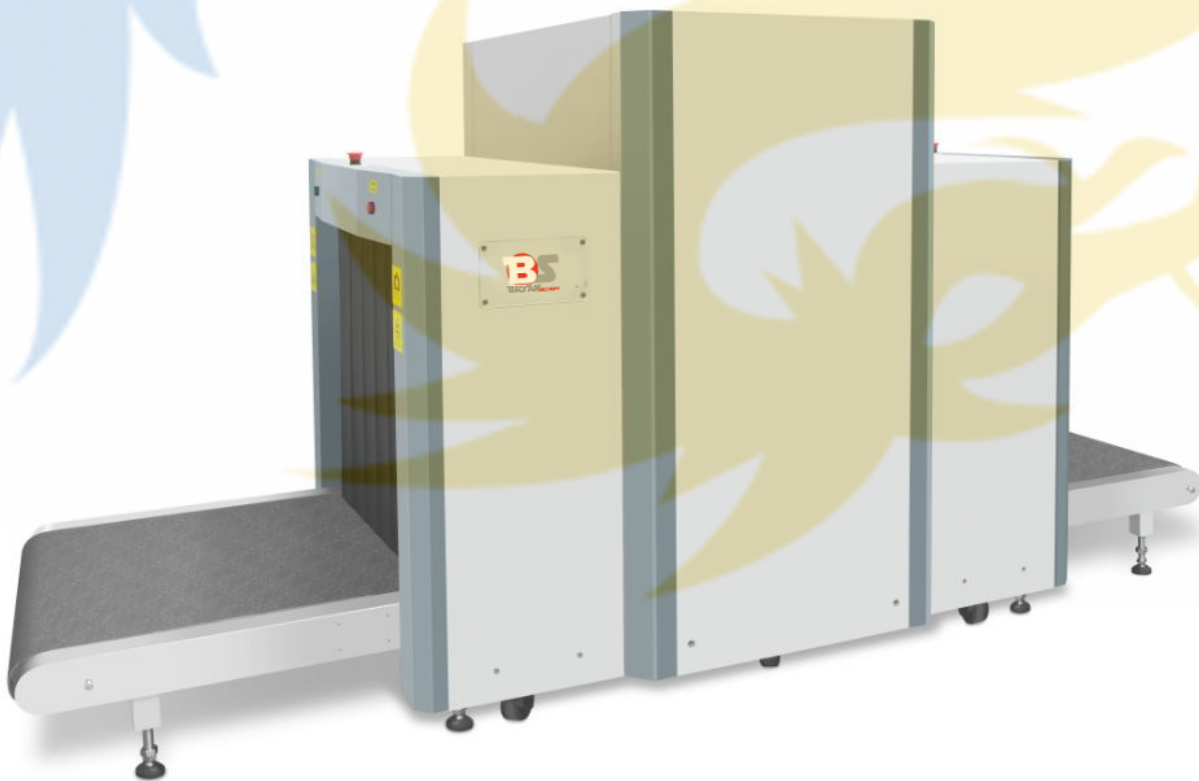



### Technical Parameters:

<b>General Specification</b>	
<b>Tunnel Size</b>	1018mm(width) ×1010mm(height)
<b>Conveyor Speed</b>	0.2m/s
<b>Conveyor Height</b>	300mm
<b>Max. Load</b>	200kg(even distribution)
<b>Wire Resolution</b>	40AWG (0.0787mm of wire) > 44 SWG
<b>Spatial Resolution</b>	horizontal Φ1.0mm    vertical Φ1.0mm
<b>Penetrable Resolution</b>	32AWG (0.202mm)
<b>Steel Penetration</b>	40mm
<b>Monitor</b>	17-inch color monitor with resolution:1280×1024
<b>X-ray Generator</b>	
<b>Anode Voltage</b>	140-160Kv
<b>Cooling/Run Cycle</b>	sealed oil cooling/ 100%
<b>Per-inspection Dose</b>	less than 1.0μGy
<b>Image Processing System</b>	
<b>Image Enhancement Features</b>	color/black & white image ,organic and inorganic elimination ,alterable absorption, super-enhancement, negative mode, high/low energy penetrability, pseudo color etc
<b>Image Resolution</b>	organics: orange inorganic: blue mixture and light metal: green
<b>Selection and Enlargement</b>	variable zoom, 1-32 times enlargement, support continuous enlargement
<b>Image Playback</b>	50 checked images playback



<b>Storage Capacity</b>	at least 100,000 images
<b>Radiation Safety</b>	
<b>Radiation Leakage</b>	less than 1.0 $\mu$ Gy /h ( 5cm away from shell) comply with all domestic and international health and radiation safety standards
<b>Film Safety</b>	in accordance with ASA/ISO1600 film safe standard
<b>System Functions</b>	
TIP(Threat Image Projection), hazardous area alarm,high density alarm, date / time display, baggage counter, user management, system timing, ray beam timing, power on self test, image back-up and search, maintenance and diagnosis, bi-directional scanning	
<b>Optional Functions</b>	
video monitor system/LED(liquid crystal display)/energy-conservation and environmental-protection equipment/electronic weighing system/speaker etc	
<b>Installation Data</b>	
<b>External Dimension</b>	3960mm(length) ×1270mm(width) ×1800mm(height)
<b>Operation Console Size</b>	1100mm(length) ×704mm(width) ×1195mm(height)
<b>Weight</b>	950Kg
<b>Operation Voltage</b>	AC220V(-15%~+10%) 50 $\pm$ 3Hz
<b>Power Consumption</b>	1kVA
<b>Operation Temperature</b>	0 $^{\circ}$ C $\pm$ 3 $^{\circ}$ C ~ +40 $^{\circ}$ C $\pm$ 2 $^{\circ}$ C
<b>Storage Temperature</b>	-40 $^{\circ}$ C $\pm$ 3 $^{\circ}$ C ~ +60 $^{\circ}$ C $\pm$ 2 $^{\circ}$ C
<b>Relative Humidity</b>	5%~95%(non-condensing)
<b>Noise Level</b>	56dB(A)